


Professional products for your  
**INTERIOR DESIGN.**

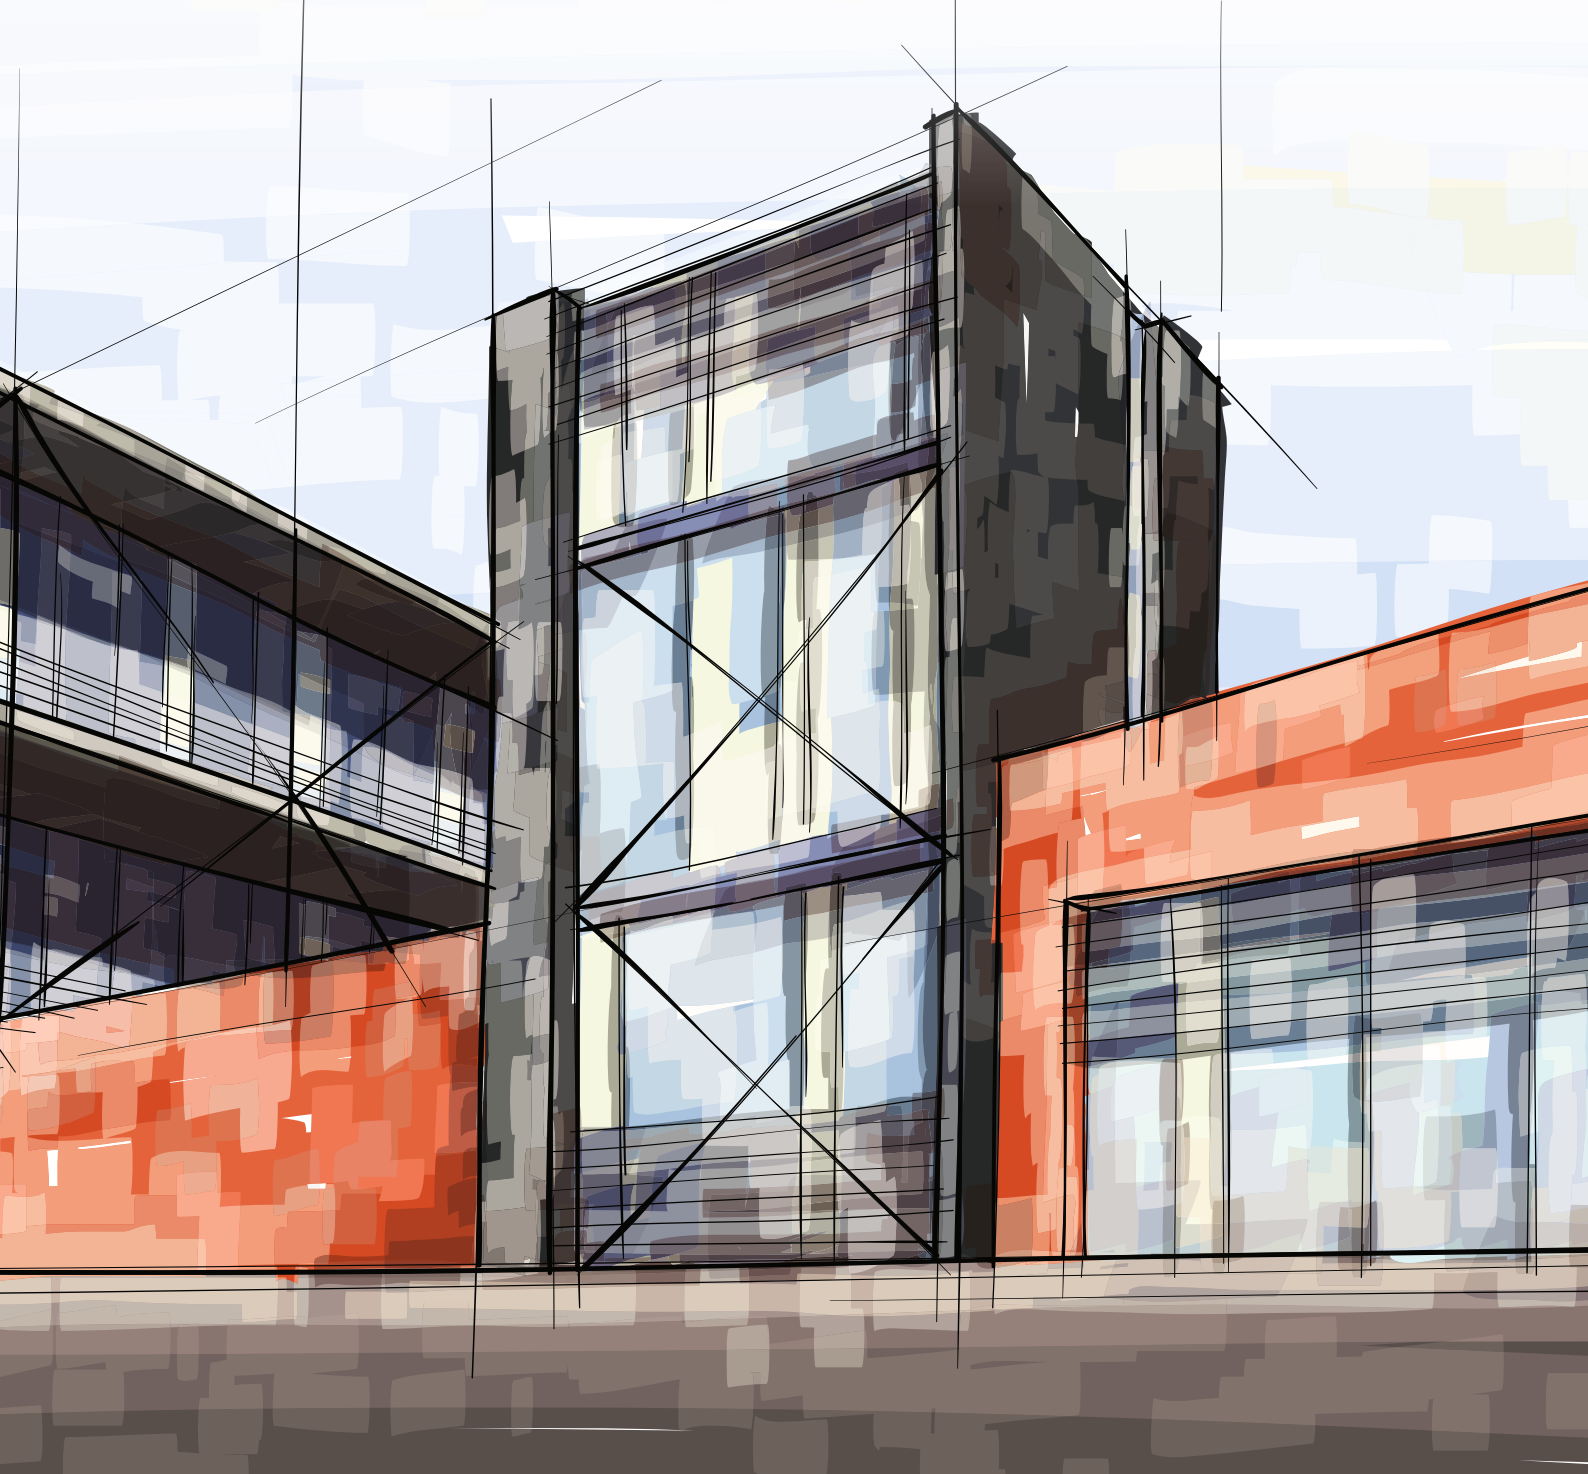

inspiring

Novus more space systems

**novus**<sup>®</sup>

**Architecture**

emcobad  
emcobau

**Worklife**

novus**office**  
novus**fastening**  
dahle**office**

**Mobility**

emcoe-scooter



novus**office**



More space systems


# NOVUS:


## Quality, functionality & design

The emco Group comprises four strong brands whose products and solutions are setting standards across the industry: emco Bad/Bau, emco Elektroroller, Novus, and Dahle.

The thread running through each of these brands is their shared philosophy that products should always centre around the needs of their users – not the other way around. After all, this is the only way to come up with truly individual and flexible solutions. Designed to meet a wide variety of different workplace requirements, Novus diverse product ranges offer uncompromisingly high-quality office technology complete with innovative details to make your everyday lives that bit more efficient and convenient – all in an attractive design.

Discover new horizons for your interior design with a whole host of options from a single source.

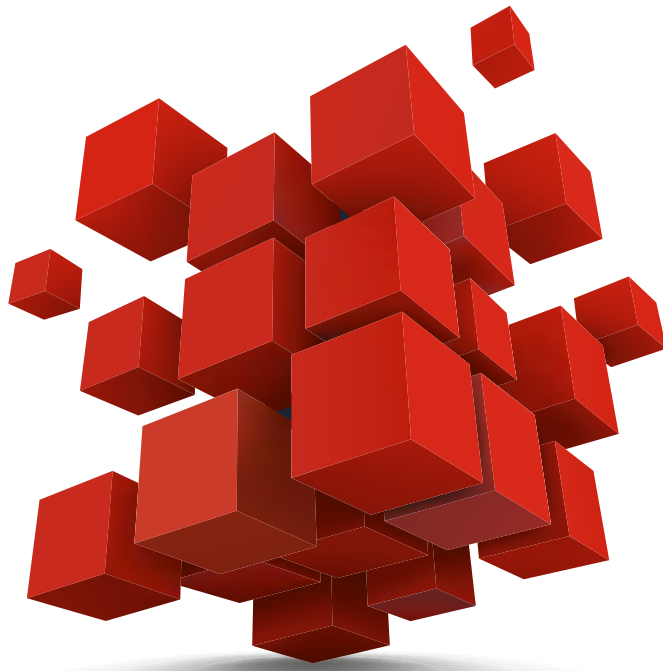

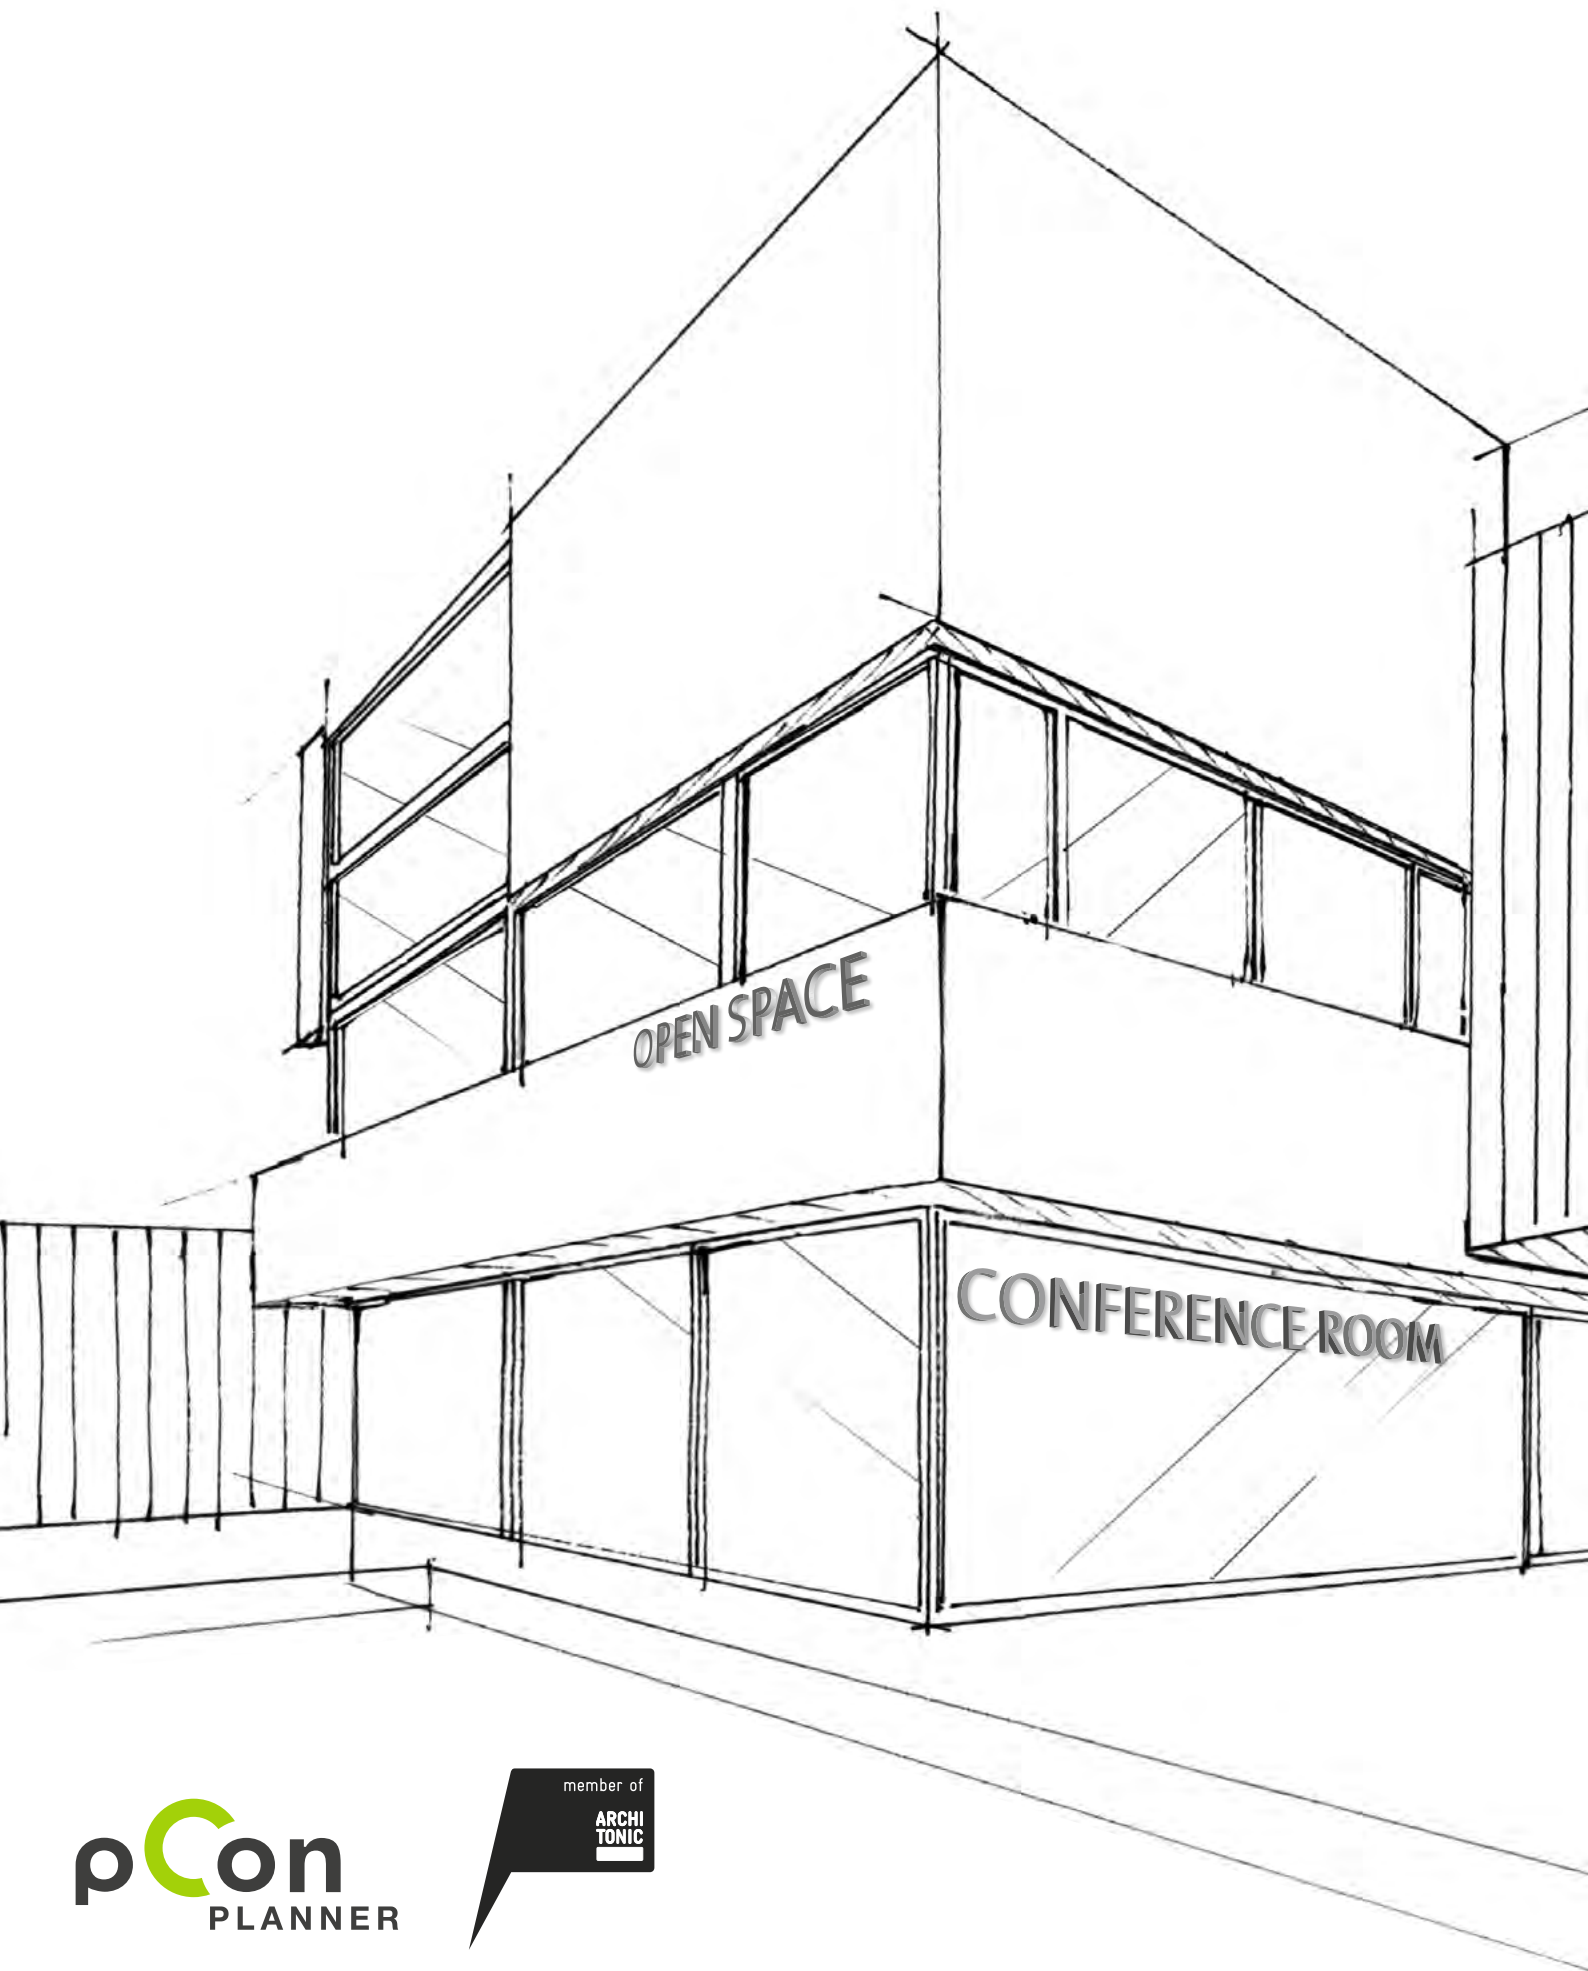

**pCon**  
PLANNER

member of


**ARCHI  
TONIC**

The Novus more space sets are deposited on the relevant interior design-planning programs.



More than just the sum of their parts:  
Our **PRODUCTS FOR** your  
**INTERIOR DESIGN.**

Our individually adaptable product range offers professional workstation equipment to suit whatever interior design concepts you have in mind. The intelligent combination of modern monitor support arms and office lighting creates a comprehensive, premium-quality solution for your interior.

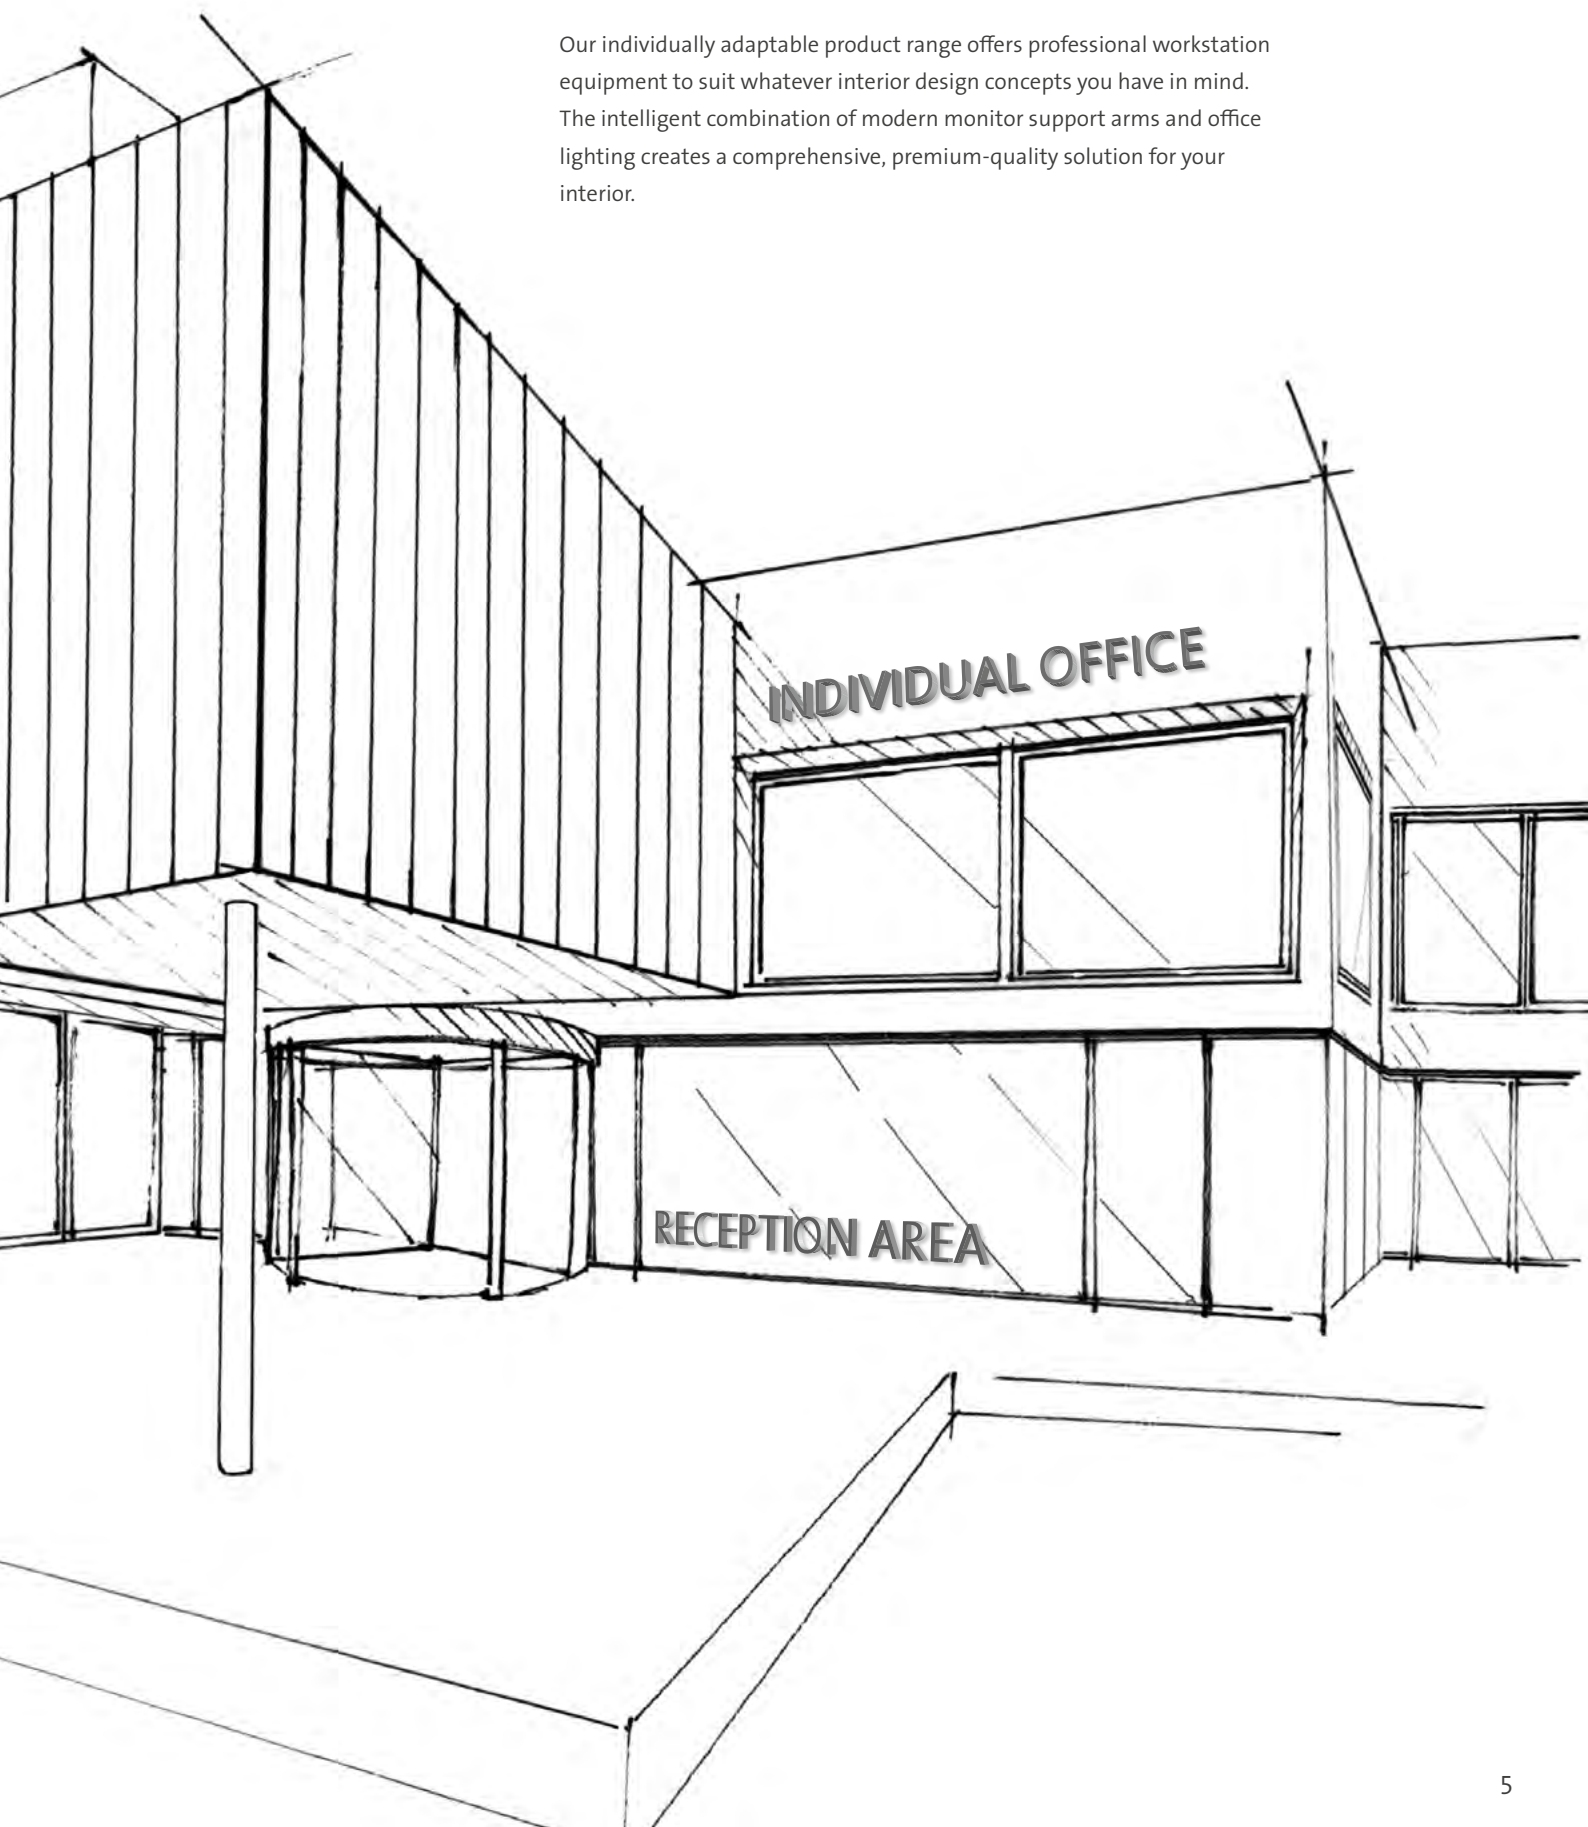

# NOVUS MORE SPACE SYSTEM:

A more customised approach to working environment.







When it comes to the possibilities afforded by the products of the Novus more space system, the sky really is the limit. Their flexible, ergonomic and individual designs make the workplace more convenient than ever.

# Flat-screen holders



## NOVUS LiftTEC Arm I, with table mount





- 1-part monitor supporting arm with gas spring technology for comfortable, ergonomic adjustment
- 3 in 1 mounting (clamp, cable port or drilling screw)
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of flat screens of 3-8 kg or 7-15 kg
- Range: 365 mm
- Perfect cable management by cable clips

Colours	Art.No.
 	930+1089+000
 	930+1159+000



## NOVUS LiftTEC Arm II, with table mount

- 2-part monitor supporting arm with gas spring technology for comfortable, ergonomic adjustment
- 3 in 1 mounting (clamp, cable port or drilling screw)
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of flat screens of 3-8 kg or 7-15 kg
- Range: 515 mm
- Perfect cable management by cable clips

Colours	Art.No.
 	930+2089+000
 	930+2159+000











#### NOVUS LiftTEC Arm III, with table mount

- 2-part monitor supporting arm with gas spring technology for comfortable, ergonomic adjustment
- With straight front arm section for a very low screen positioning
- 3 in 1 mounting (clamp, cable port or drilling screw)
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of flat screens of 3-8 kg or 7-15 kg
- Range: 515 mm
- Perfect cable management by cable clips



Colours	Art.No.
 	930+3089+000
 	930+3159+000





#### NOVUS TSS Single folding arm II

- The practical set for the correct ergonomic use of a flat screen at the workstation
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Range: TSS-folding arm II 450 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Carrying capacity: monitor weight 10 kg, infinitely variable height
- Height of the column: 445 mm

Comprising:

- TSS column 445 system clamp 1
- TSS folding arm II

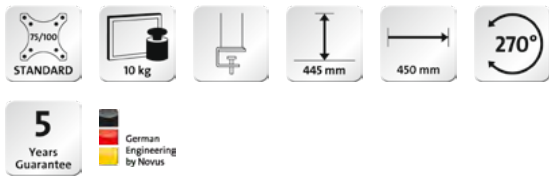

Colours	Art.No.
	220+0250+000



# Flat-screen holders



## NOVUS TSS Basic

- Novus bestseller for ergonomically correct use of the flat screen at your workstation
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Range: folding arm III 505 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Carrying capacity: monitor weight 12 kg, infinitely variable height
- Height of the column: 445 mm

### Comprising:

- TSS column 445 system clamp 1
- TSS folding arm III

### Colours



### Art.No.

220+0050+000



## NOVUS MY one plus C, with system clamp

- Elegant monitor holder with infinitely height adjustable folding arm
- Combination of MY base and MY arm for more design, flexibility and dynamics at the workplace
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Mounting standard 75/100 mm
- Mounting of flat screens up to 5 kg and ca. 22"
- Range: 415 mm
- Monitor arm infinitely adjustable in height, tilt and rotation
- Height of the column: 350 mm
- Supplied with cable clips
- Combinable with NOVUS MY tab and NOVUS Quick Release


### Colours



### Art.No.

910+2019+000



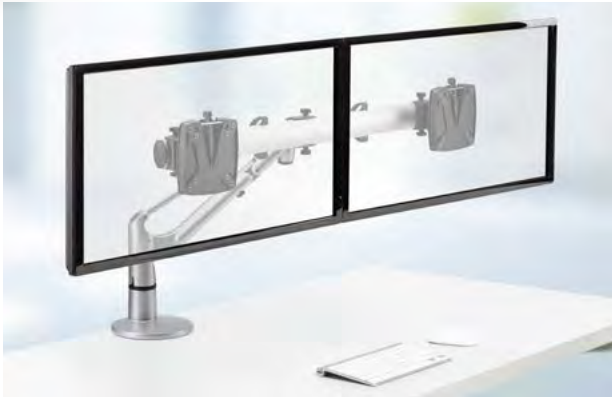



#### NOVUS LiftTEC Arm I Dual, with table mount

- Double monitor support arm for comfortable, ergonomic adjustment of the monitor to the personal needs with gas spring
- 3 in 1 mounting (clamp, cable port or drilling screw)
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of two flat screens up to 7 kg alongside or above one another
- Range: 415 mm
- Perfect cable management by cable clips



Colours	Art.No.
 	930+1279+000




#### NOVUS Comfort Duo, with drilling screw fitting

- NOVUS LiftTEC the innovative support arm concept for ergonomics and special convenience
- Range: 547 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Drilling screw fitting, desktop thickness 5-70 mm
- Carrying capacity: monitor weight 2 x 3-8 kg, infinitely variable height
- Height of the column: 120 mm

Comprising:

- TSS column 120 drilling screw fitting
- 2 x TSS-LiftTEC® arm II



Colours	Art.No.
	220+0150+000

# Flat-screen holders



NEW



## NOVUS TSS Duo Telescope

- The extremely efficient double screen solution for installation near walls or for two opposite facing workstations from the NOVUS Tetra Support System
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Range: TSS telescopic arm III 314-400 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Total carrying capacity: 11 kg, evenly spread over all support arms, infinitely variable height
- Height of the column: 445 mm

### Comprising:

- TSS column 445 system clamp 1
- 2 x TSS telescope arm III

### Colours



### Art.No.

220+0260+000



NEW



## NOVUS TSS Trio Telescope

- 3 flat screen solution for significantly enhanced productivity
- Range: TSS-Telescope arm III XL 700 476-724 mm / support carriage 105mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Drilling screw fitting HD, for desktop thickness 15-70 mm
- Total carrying capacity: 45 kg, evenly spread over all support arms, infinitely variable height
- Height of the column: 445 mm

### Comprising:

- TSS column 445 drilling screw fitting HD
- TSS support carriage
- 2 x TSS-Telescope arm III XL 700

### Colours



### Art.No.

220+0300+000







## NOVUS Control Center

- Everything in view the monitor bridge of the NOVUS Tetra-Support-System
- Range: TSS folding arm III 505 mm / SlatWall-LM-Arm 0-0-1 125 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Total carrying capacity: 22 kg, evenly spread over all support arms
- Height of the column: 445 mm
- Size SlatWall over the desk: 1200 x 445 mm

### Comprising:

- 2 x TSS column 445 system clamp 1
- SlatWall element 120
- 2 x TSS folding arm III
- 2 x SlatWall-LM arm 0-0-1

Colours	Art.No.
	220+0130+000



## NOVUS TSS Quattro Telescope


- four flat screens, no problem for the NOVUS Tetra-Support-System
- Range: TSS-Telescope arm III 314-400 mm / support carriage 105mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Drilling screw fitting HD, for desktop thickness 15-70 mm
- Total carrying capacity: 48 kg, evenly spread over all support arms, infinitely variable height
- Height of the column: 845 mm

### Comprising:

- TSS column 845 drilling screw fitting HD
- 4 x TSS-Telescope arm III

Colours	Art.No.
	220+0310+000

# Flat-screen holders

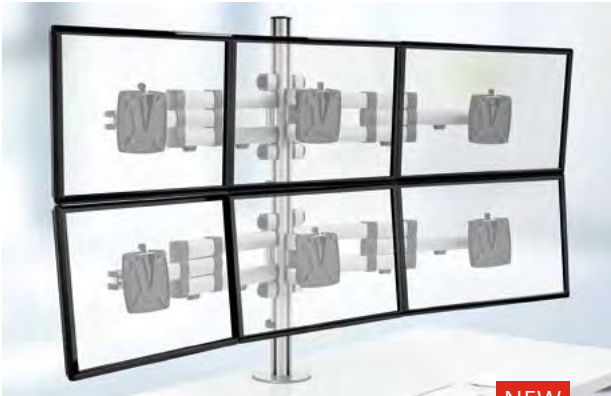

## NOVUS TSS Sextett Telescope

- six flat screens, no problem for the NOVUS Tetra-Support-System
- Range: TSS-Telescope arm III XL 700 476-724 mm / support carriage 105mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Drilling screw fitting HD, for desktop thickness 15-70 mm
- Total carrying capacity: 48 kg, evenly spread over all support arms, infinitely variable height
- Height of the column: 845 mm

### Comprising:

- TSS column 845 drilling screw fitting HD
- 2 x TSS support carriage
- 4 x TSS-Telescope arm III XL 700

### Colours



### Art.No.


220+0320+000



### NOVUS LiftTEC Arm IV, with Slat Wall Adapter

- 1-part monitor supporting arm with gas spring technology for comfortable, ergonomic adjustment
- With SlatWall adapter
- Flat monitor mounting with cross joint and QuickRelease, suitable for mounting standard 75/100
- Mounting of flat screens of 3-6 kg
- Range: 355 mm
- Perfect cable management by cable clips
- Obligatory supplement is a SlatWall element

Colours	Art.No.
	981+4069+000

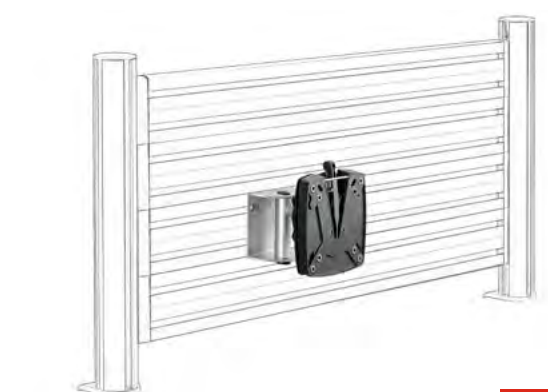


**NEW**



### NOVUS SlatWall-support carriage TSS

- High quality support carriage for mounting a monitor directly to a SlatWall
- For mounting in a slot
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of flat screens up to 10 kg
- High mobility in confined space by ball joint
- Range: 110 mm
- 60° swivelling range for any chosen viewing angle
- Obligatory supplement is a SlatWall element

Colours	Art.No.
	963+0119+013

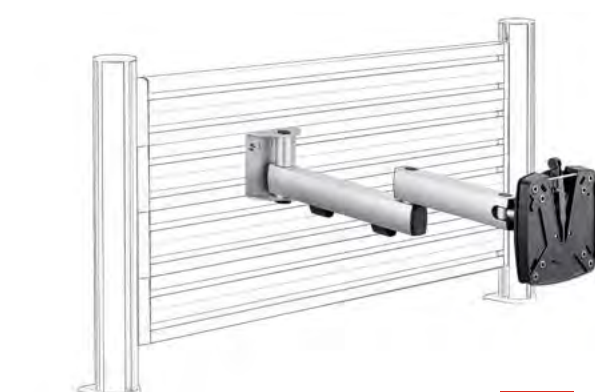

**NEW**




### NOVUS SlatWall-folding arm II TSS

- High quality support carriage for mounting a monitor directly to a SlatWall
- For mounting in a slot
- Classy aluminium finish with anodised surfaces
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of flat screens up to 10 kg
- Restrict movement by tightening the joints
- Range: 445 mm
- Perfect cable management by cable clips
- Obligatory supplement is a SlatWall element

Colours	Art.No.
	964+0119+014

# Organisation wall mount

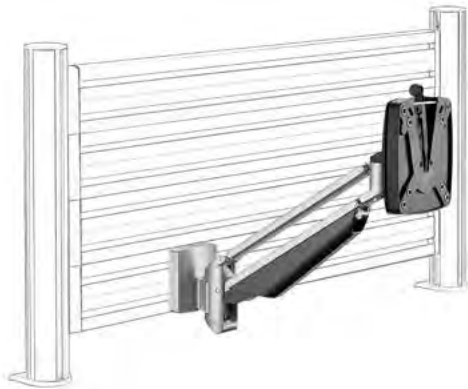

## NOVUS SlatWall Clu Arm I, with SlatWall mount

- Elegant 1-piece monitor support arm with gas technology spring for a comfortable, ergonomic adjustment of the monitor
- Integrated SlatWall universal adapter for quick mounting with central screw connection for organisation walls with 1 or 2 slots
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of flat screens of 2-7 kg
- Range: 314 mm
- Enables horizontal positioning of the screen
- Perfect cable management
- Obligatory supplement is a SlatWall element

### Colours


### Art.No.



990+1079+000



990+1071+000

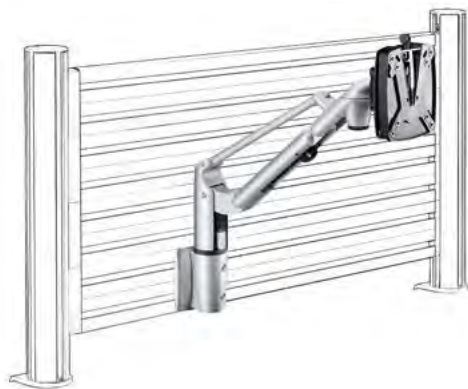

## NOVUS SlatWall LiftTEC Arm I, with SlatWall mount


- 1-part monitor supporting arm with gas spring technology for comfortable, ergonomic adjustment
- With SlatWall adapter
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Mounting of flat screens of 3-8 kg
- Range: 400 mm
- Perfect cable management by cable clips
- Obligatory supplement is a SlatWall element

### Colours

### Art.No.



981+1089+000

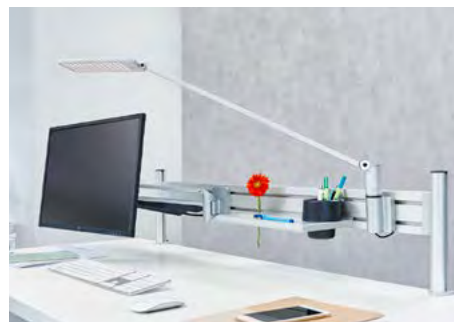




### NOVUS Business Combination

- Optimal set for your notebook workstation
- Classy aluminium finish with anodised surfaces
- Removable clamping grips for protection from theft and cable holder
- Range: TSS folding arm III 505 mm / TSS notebook holder 589 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Column attachment: system clamp 1, clamping length 14-40 mm
- Carrying capacity: monitor weight 7 kg / notebook weight 5 kg, infinitely variable height
- Height of the column: 445 mm

#### Comprising:

- TSS column 445 system clamp 1
- TSS folding arm III
- TSS notebook holder



Colours	Art.No.
	220+0070+000




### NOVUS MY one plus & Light

- The space-saving combination of flat screen support and lighting
- Range: MY arm 415 mm / Attenzia complete 726 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Carrying capacity: monitor weight 5 kg, infinitely variable height
- Height of the column: 350 mm
- Extremely powerful LED luminaire with a luminaire luminous flux of max. 1708 lm

#### Comprising:

- MY column 350 system clamp 1
- MY arm
- Attenzia complete



Colours	Art.No.
	220+0290+000





NEW



## NOVUS Office Toolbar Duo

- 1-piece monitor support arm with gas technology spring for a comfortable, ergonomic adjustment of the monitor
- Range: Clu I SW 314 mm / Attenzia complete 726 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Table mounting with system clamp 1 for a desktop thickness of 14-40 mm
- Carrying capacity: monitor weight 2 x 2-7 kg, gas spring system for adjustable height
- Height of the column: 250 mm
- Extremely powerful LED luminaire with a luminaire luminous flux of max. 1708 lm
- Size MY Toolbar over the desk: 1600 x 250 mm

### Comprising:

- 1 x MY Toolbar 1600 mm
- 2 x Clu I SW silver
- Attenzia complete

Colours	Art.No.
	220+0280+000



## NOVUS TSS Wall Station

- Special applications demand special solutions - the NOVUS Tetra-Support-System for wall mounting.
- Range: TSS-support carriage 105 mm / keyboard holder 528 mm
- Easy mounting of the monitor by quick release, suitable for mounting standard 75/100
- Carrying capacity: monitor weight 15 kg, infinitely variable height
- Length of the column: 890 mm.

### Comprising:

- TSS 890 wall rail
- TSS support carriage
- TSS keyboard holder

Colours	Art.No.
	220+0100+000



### NOVUS MY point

- Mobile tablet holder as the practical and modern basis for presentation and communication
- Universal stand for Tablets PC's with a size from 7" to 10" (clamping length 160-300 mm)
- Tablets can be used portrait or landscape format
- Anodised aluminium column with solid metal base
- Rotation and tilt is given by the cross joint for more mobility at limited space
- Infinitely height adjustable
- Height of the column: 250 mm
- Includes two cable clips



#### Colours



#### Art.No.

910+3099+000



NEW

### NOVUS TabletCase

- Premium tablet holder with minimalist design
- Tablet inserted in seconds
- Camera accessible thanks to aperture for camera hole
- Mounting standard 100x100
- The integrated lock provides secure protection against theft.
- Cleverly designed cable routing allows the tablet to be used all the time with the charging cable connected (we recommend using the original cable)
- Classy aluminium finish with anodised surfaces
- High-quality on/off switch with locking function
- Exposed home button for full functionality



#### Colours



#### Art.No. iPad Mini 7,9"

883+1018+000

883+1019+000

#### Art.No. iPad 9,7"

883+1028+000

883+1029+000

#### Art.No. iPad Pro 12,9"

883+1038+000

883+1039+000

#### Art.No. Microsoft Surface Pro 4

883+0018+000

883+0019+000








## NOVUS TabletSafe iPad


- Mobile tablet holder as the practical and modern basis for presentation and communication
- High-quality metal frame with velour chrome surface and lacquered display bezel
- In the anthracite-coloured version, metal frame and display bezel are finished in matching lacquer
- The integrated lock provides secure protection against theft.
- Metal clips in the enclosure permit exact positioning of different tablets in the frame.
- Cleverly designed cable routing allows the tablet to be used all the time with the charging cable connected (we recommend using the original cable)
- Dimensions: W 301.5 x H 231.5 x D 20 mm
- Control functions remain accessible by the practical apertures at the backside. They can be closed off with the delivered cover caps.
- Can be combined with TabletSafe stands and wall mounts as well as with all connect columns and connect support arms

Colours	Art.No. iPad 10"	Art.No. Android Tablet 10"
	881+1318+000	881+0318+000
	881+1308+000	881+0308+000
	881+1301+000	881+0301+000



## NOVUS TabletFix

- Universal, simple tablet holder
- For the use of different tablets of approx. 10 inches
- Mounting standard 100 x 100 and connect joint
- In high-quality metal with powder-coated finish


Colours	Art.No.
	881+3115+000



#### NOVUS DeskMount

- Simple desktop stand for NOVUS TabletSafe
- Ideal for using the TabletSafe on the desk, table or counter
- With fixed angle of inclination of 55 degrees
- In high-quality metal with powder-coated finish




Colours	Art.No.
	882+0025+000



#### NOVUS WallMount

- Wall mount for attachment of the TabletCase and TabletSafe to the wall
- With fixed tilting angle of 33 degrees
- In high-quality metal with powder-coated finish



Colours	Art.No.
	882+0035+000



**2**  
Years  
Guarantee

200 mm



## NOVUS DeskStand 200

- Desktop stand for NOVUS TabletSafe
- High-quality, anodised aluminium column with internal cable guide and brushes to allow cables to protrude flexibly at any height
- Stylish metal base provides firm standing
- Ideal for using the TabletSafe on the desk, table or counter
- Moveable connect joint for holding the TabletSafe
- The connect joint provides a swivelling range of 360 degrees - with concealed cable routing, the tablet can be turned through +/- 45 degrees
- Angle of inclination at the connect joint can be adjusted to any position for an optimum viewing angle
- Height of the column: 200mm

### Colours

### Art.No.



882+0205+000



882+0209+000



**2**  
Years  
Guarantee

1000 mm



## NOVUS FloorStand 1000

- Floor stand for NOVUS TabletSafe
- High-quality, anodised aluminium column with internal cable guide and brushes to allow cables to protrude flexibly at any height
- Stylish metal base provides firm standing
- Ideal for using the TabletSafe in the showroom or shop window
- Moveable connect joint for holding the TabletSafe
- The connect joint provides a swivelling range of 360 degrees - with concealed cable routing, the tablet can be turned through +/- 45 degrees
- Angle of inclination at the connect joint can be adjusted to any position for an optimum viewing angle
- Height of the column: 1000 mm

### Colours

### Art.No.



882+1005+000



882+1009+000

# Attenzia space active HCL

The innovation in  
office lighting.

**Light panels:** 270° rotatable, dimmable and with optimal glare protection thanks to grids with deep light cones.

**HCL technology:** For the perfect progression of daylight, from energizing cool white to relaxed warm white.



Working healthy  
with biodynamic light

**Colours:**  
white, silver and black



**Presence sensor:** After 20 minutes the light automatically turns off.

**Light sensor:** Switches off automatically after 5 minutes over 125% of the set point | switches on automatically when going below 100% of the set point.

**Touch display:** Setting (on/off), automatic mode "HCL", manual mode "tunable white" (2,700 – 6,500 K), dimming (all panels simultaneously).

**Material:** High-quality surface finish on the column (anodized aluminum or lacquered).

**Design:** Filigree, with innovative built-in technology and intelligent, internal cable routing, which makes the cable disappear under the desk.


**Floor stand:** Fits optimally under the bottom of tables.






## Attenzia space active HCL

- Biodynamic light
- Adjustable light colour ranging 2700 K to 6500 K
- Presence & light sensor
- Multifunctional touch panel
- Panels dimmable simultaneously

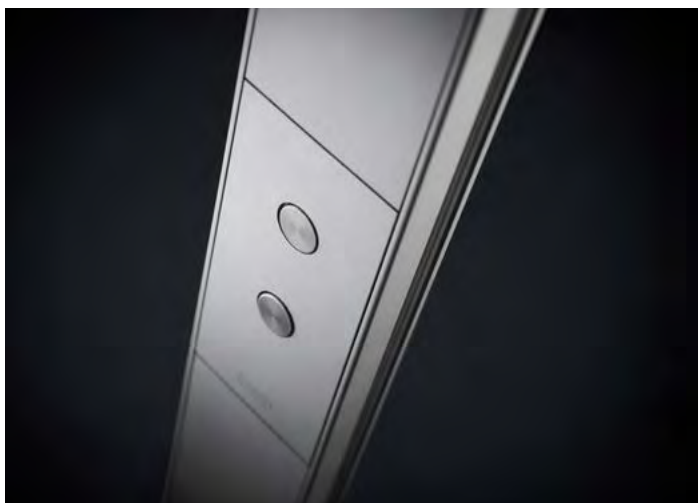

## Attenzia space XT

- Presence & light sensor
- 2 switches: On/Off/Dim
- Panels separately dimmable

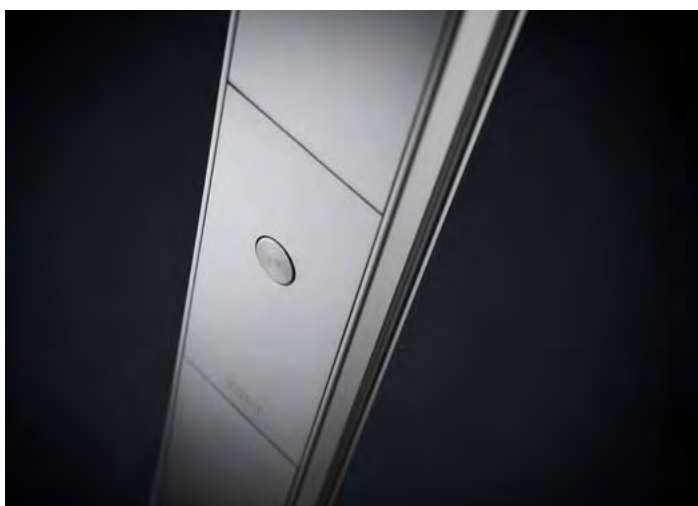

## Attenzia space +

- Presence & light sensor
- 1 switch: On/Off/Dim
- Panels dimmable simultaneously



## Attenzia space

- 1 switch: On/Off/Dim
- Panels dimmable simultaneously








Colour white



Colour black

All products:




			Attenzia space (3.000 K)	Attenzia space (4.000 K)
Item number	white		730+3191+000	740+3191+000
	black		730+3198+000	740+3198+000
	silver		730+3199+000	740+3199+000
Lamp			3 Panels – each with 120 LEDs	
Color temperature			3.000 K	4.000 K
Color rendering index			R <sub>a8</sub> 85 / R <sub>a</sub> > 80	R <sub>a8</sub> 85 / R <sub>a</sub> > 80
Luminaire luminous flux			9.500 lm	10.300 lm
Consumption in watts			91 W	91 W
Luminaire light efficiency			104 lm/W	113 lm/W
Energy consumption			91 kWh/1.000h	91 kWh/1.000h



# Attenzia space model series



Colour silver

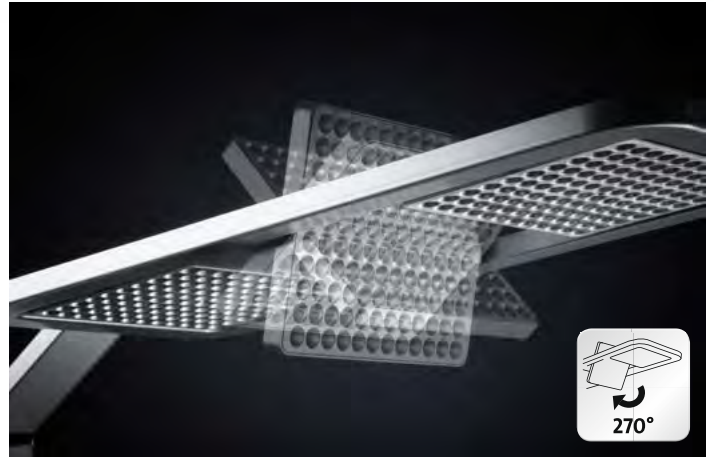

Rotatable panels



Floor stand

Attenzia space + (3.000 K)	Attenzia space + (4.000 K)	Attenzia space XT (3.000 K)	Attenzia space XT (4.000 K)	Attenzia space active HCL
730+4191+000	740+4191+000	730+5191+000	740+5191+000	740+6191+000
730+4198+000	740+4198+000	730+5198+000	740+5198+000	740+6198+000
730+4199+000	740+4199+000	730+5199+000	740+5199+000	740+6199+000
3 Panels – each with 120 LEDs		3 Panels – each with 120 LEDs		3 Panels – each with 120 LEDs
3.000 K	4.000 K	3.000 K	4.000 K	2.700 K – 6.500 K
$R_{a85} / R_a > 80$	$R_{a85} / R_a > 80$	$R_{a85} / R_a > 80$	$R_{a85} / R_a > 80$	$R_{a85} / R_a > 80$
9.500 lm	10.300 lm	10.000 lm	10.800 lm	9.400 lm – 10.600 lm
93 W	93 W	100 W	100 W	93 W
102 lm/W	110 lm/W	100 lm/W	108 lm/W	101 lm/W – 114 lm/W
93 kWh/1.000h	93 kWh/1.000h	100 kWh/1.000h	100 kWh/1.000h	93 kWh/1.000h

LED lifetime: L70B50 50,000 hours | With a maximum failure rate of 10%. The lifetime specification results from extrapolated data from the LM80 test of the LED manufacturer after 10,000 hours running time.  
Connection cable: ca. 2 m, Euro plug | Rated voltage: 100–240 V, 50–60 Hz.








### NOVUS Attenzia task, with clamp 1

- Smart designed LED desk-top luminaire with slim-line 2-part aluminium support arm and internal cable routing
- Classy aluminium finish with anodised and galvanised surfaces
- The luminaire can be dimmed to any level and switches off automatically.
- table clamp for a table thickness of 10-50 mm
- Very high luminaire luminous flux of max. 742 lm for perfect illumination
- Extremely energy efficient at luminaire luminaire efficiency with 82,7 lm/W
- Good colour recognition thanks to high colour rendering index of 86 (>80)
- Stimulating neutral white light colour with a colour temperature of 4000 K
- Large operating range: 1015 mm
- Cable length: approx. 2 m
- This luminaire contains built-in LED lamps
- Luminaire suitable for light sources of energy classes A, A+ and A++
- Lamps cannot be replaced within the light
- ENEC certified
- Average illuminance E = 1273 LUX

#### Comprising:

- Attenzia task
- Attenzia clamp 1

Colours	Art.No.
	740+1211+000
	740+1218+000
	740+1219+000

# Workstation luminaire






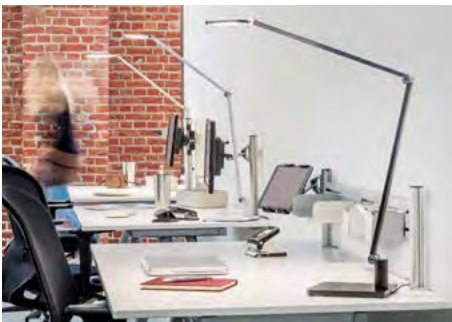
NEW



## NOVUS Attenzia task, with base plate

- Smart designed LED desk-top luminaire with slim-line 2-part aluminium support arm and internal cable routing
- Classy aluminium finish with anodised and galvanised surfaces
- The luminaire can be dimmed to any level and switches off automatically.
- Very high luminaire luminous flux of max. 742 lm for perfect illumination
- Extremely energy efficient at luminaire light efficiency with 82,7 lm/W
- Good colour recognition thanks to high colour rendering index of 86 (>80)
- Stimulating neutral white light colour with a colour temperature of 4000 K
- Large operating range: 1015 mm
- Cable length: approx. 2 m
- This luminaire contains built-in LED lamps
- Luminaire suitable for light sources of energy classes A, A+ and A++
- Lamps cannot be replaced within the light
- Average illuminance E = 1273 LUX

Colours	Art.No.
	740+1291+000
	740+1298+000
	740+1299+000





#### NOVUS Attenzia complete, with Ø 13 mm bolt

- Smart designed LED desk-top luminaire with slim aluminium support arm and internal cable routing for illuminating the entire work space
- Classy aluminium finish with anodised and galvanised surfaces
- The luminaire can be dimmed to any level and switches off automatically.
- Extremely high luminaire luminous flux of max. 1708 lm for perfect illumination
- Extremely energy efficient at luminaire light efficiency with 83,3 lm/W
- Good colour recognition thanks to high colour rendering index of 86 (>80)
- Stimulating neutral white light colour with a colour temperature of 4000 K
- Action radius: 726mm
- Cable length: approx. 2 m
- For fitting to a NOVUS MY column, supplied without mount
- This luminaire contains built-in LED lamps
- Luminaire suitable for light sources of energy classes A, A+ and A++
- Lamps cannot be replaced within the light
- Average illuminance E = 1714 LUX




#### Colours



#### Art.No.

740+2109+000

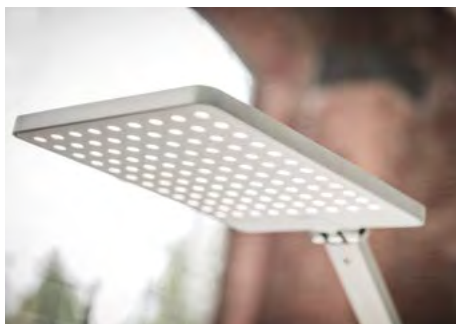

# Workstation luminaire






## NOVUS Attenzia complete, with SlatWall-Adapter

- Smart designed LED desk-top luminaire with slim aluminium support arm and internal cable routing for illuminating the entire work space
- Classy aluminium finish with anodised and galvanised surfaces
- The luminaire can be dimmed to any level and switches off automatically.
- Equipped with SlatWall adapter for organisation walls
- Extremely high luminaire luminous flux of max. 1708 lm for perfect illumination
- Extremely energy efficient at luminaire light efficiency with 83,3 lm/W
- Good colour recognition thanks to high colour rendering index of 86 (>80)
- Stimulating neutral white light colour with a colour temperature of 4000 K
- Action radius: 726mm
- Cable length: approx. 2 m
- This luminaire contains built-in LED lamps
- Luminaire suitable for light sources of energy classes A, A+ and A++
- Lamps cannot be replaced within the light
- Average illuminance E = 1714 LUX

## Comprising:

- Attenzia complete
- 1 x SlatWall-Adapter

Colours	Art.No.
	740+2171+000
	740+2178+000
	740+2179+000



# DAHLE OFFICE:

for more productivity at work.


[www.novus-dahle.com](http://www.novus-dahle.com)

Presenting information with ease  
– Dahle Flip-Charts and boards  
support your visual communication.  
With Dahle document shredders  
confidential information never gets  
into wrong hands. Safe, comfortable  
and powerful.







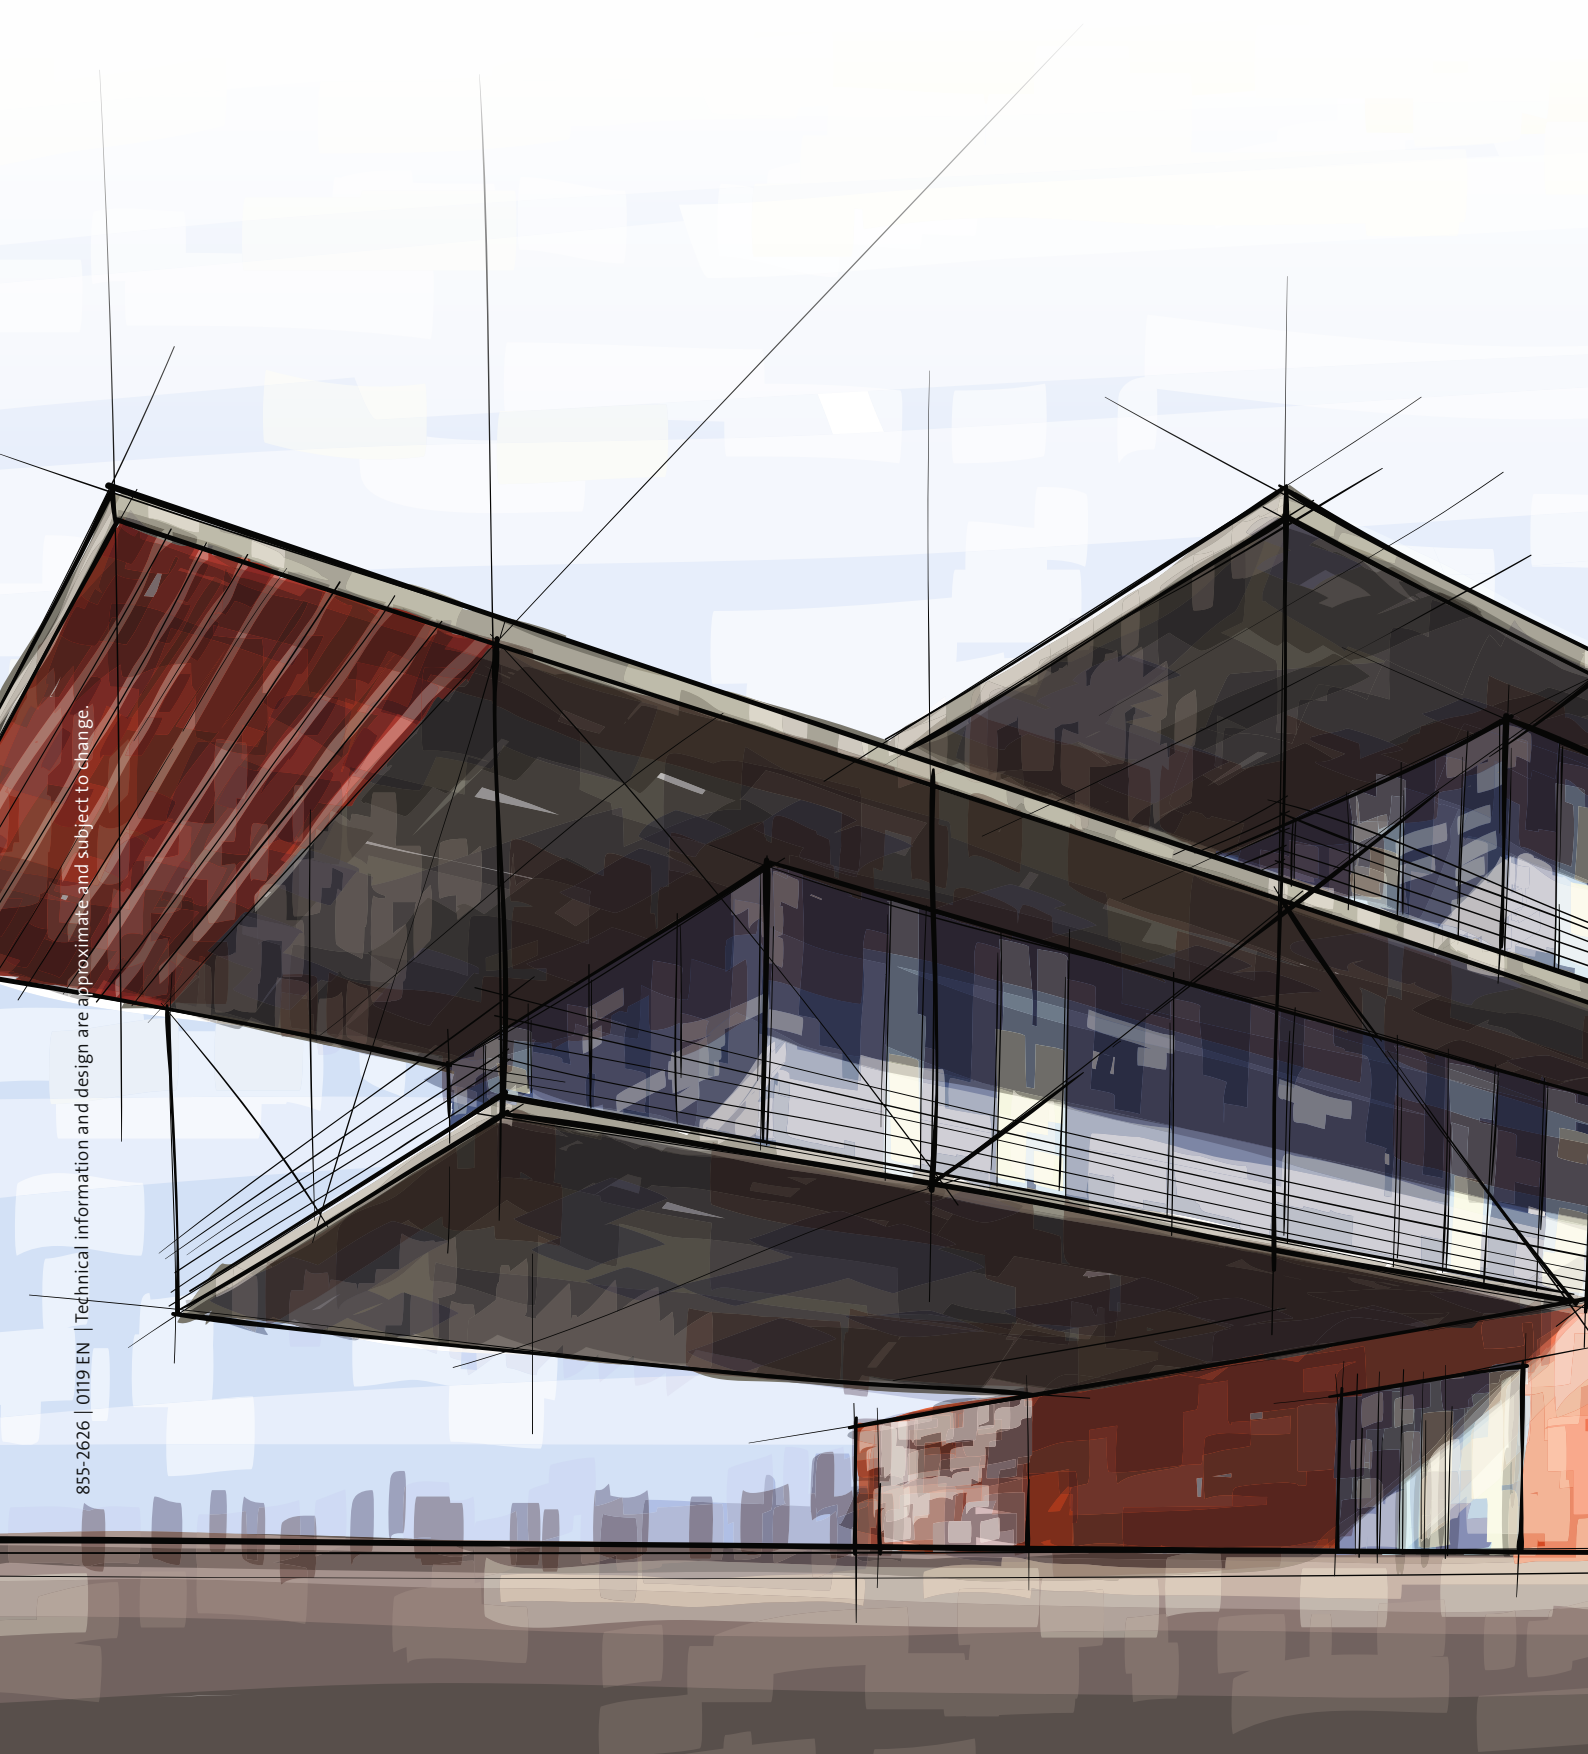

855-2626 | 0119 EN | Technical information and design are approximate and subject to change.

Novus Dahle GmbH  
Breslauer Straße 34–38  
49808 Lingen (Ems), Germany  
Tel. +49 (0) 591 9140-0  
Fax +49 (0) 591 9140-841  
info@novus-dahle.com

[www.novus-dahle.com](http://www.novus-dahle.com)

A company of the

